

TENDER DOCUMENT

“Special Roads Programme 2010-11 ”

PRICE BID

THORAPPADI Town Panchayat

NAME OF THE WORK : “Providing Cement Concrete Roads
Bharathiyar Street, Vellathumarriyamman
Koil Street, Meenchiamman Koil Street,
Vellathumarriyamman Koil to OHT,
Nerinjipettai Street, Nandhakumar Street,
(Package No: 2)”in Thorappadi Town
Panchayat

OFFICER INVITING BIDS : Executive Officer
Thorappadi Town Panchayat

Price Bid Date :

Invitation for Bid No. 2

To:

Executive officer,
Thorappadi Town Panchayat,

We, the undersigned, declare that:

(a) We have examined and have no reservations to the Bid Documents.

(b) We offer to execute in conformity with the Bid Documents for the work of **“Providing Cement Concrete Roads Bharathiyar Street, Vellathumarriyamman Koil Street, Meenchiamman Koil Street, Vellathumarriyamman Koil to OHT, Nerinjipettai Street, Nandhakumar Street,(Package No: 2)”**in Thorappadi Town Panchayat under the “Special Roads Programme 2010-11”.

(c) The total price of our Bid, excluding any discounts offered in item (d) below is

- (i) In figures :- Rs/-
- ii) In Words:- Rupees

(d) The discounts offered are

- (i) In figures :- Rs...../-
- (ii) In Words:- Rupees

(e) The net price of our bid, after discount offered in (d) above is

- (i) In figures :- Rs/-
- (ii) In Words:- Rupees

- (f) Our Bid shall be valid for a period of **90 days** from the date fixed for the bid submission deadline in accordance with the Bidding Documents, and it shall remain binding upon us and may be accepted at any time before the expiry of that period.
- (g) If our Bid is accepted, we commit to remit Security Deposit in accordance with the Bid Documents within the stipulated time.

Bidder's Signature

Schedule of Rates and Approximate Quantities

- 1) The quantities given here are those upon which the item rate tender cost of the work is based, but they are subject to alternations, omissions, deductions or addition as provided for in the conditions of this contract and do not necessarily show the actual quantities of work to be done. The unit rates quoted below are those governing payment for extras or deductions or omissions according to the condition of the contract, as set forth in the Standard Specifications for roads and bridges with the MOST specifications and other condition of specifications of the contract.
- 2) It is to be expressly understood that the measured work is to be taken net (Not withstanding any custom or practice to the contrary) according to the actual quantities. When in places and finished according to the drawings, or as may be ordered from time to time by the Engineer in charge and the cost calculated by measurement or weight at the respective prices, without any additional charge for any necessary or contingent works concerned therewith. The rates quoted are for the finished works in situ and complete in every respect.
- 3) The description given in Schedule - A are to indicate the item of work only and need not be construed as full specification. The quoted rate shall be for carrying out the item as per standards and specifications described in the relevant MOST specification. The contractor shall take no advantage of any apparent error or omission in the Schedule - A description.
- 4) The Tenderers should quote their rates for the quantity and units specified under metric units under Schedule 'A'.
- 5) The contractor should sign all the pages of schedule 'A' enclosed in the tender document without any omission. Otherwise the tender will be liable for rejection as per the rules.

Executive Officer

Thorappadi Town Panchayat

SCHEDULE 'A'

Package No. : 2
Name of the Work : "Providing Cement Concrete Roads Bharathiyar Street,
Vellathumariyamman Koil Street, Meenchiamman Koil Street, Vellathumariyamman Koil
to OHT, Nerinjipettai Street, Nandhakumar Street,

(Package No: 2)"in Thorappadi Town Panchayat

Sl. No.	Probable quantity	Description Of Work	TNDSS Number	Rates in		Units in words	Amount (Rs.)
				Figures	Words		
1	211 Cum	Earth work excavation in all classes of soils such as hard stiff clay, stiff black cotton, hard red earth, shales, murrum, ordinary earth, earth mix with 50% fair sized boulders etc., with initial lead and lifts including laying, spreading, leveling, sectioning breaking clods etc., in all incidental charges etc., complete as per standard specification for foundations SS 20B					
2	463 Cum	Supply delivery and filling of River sand in layer of not more than 15 cm thick including watering with all layers and consolidation complying with standard specification including cost and conveyance of sand at site and all labour charges and all other incidental charges etc. complete as per standard specification.					
3	346 Cum	Cement concrete of mix 1:5:10 (One cement five sand ten aggregates) using 40mm gauge hard broken granite including cost conveyance of all materials to site including formwork and centering labour charges, transporting and placing in position including shoring, strutting forming protective bunds, cofferdams bailing out of water labour for mixing compacting, finishing and curing, working at depths, tools and plants and incidental charges such as sheeting, shoring and bracing and their subsequent removal etc. complete as per standard specification.					

Sl. No.	Probable quantity	Description Of Work	TNDSS Number	Rates in		Units in words	Amount (Rs.)
				Figures	Words		
4.	1471 Sqm	Providing Centering, Strutting by using M.S. sheets and angles strutting arrangements for the sides and soffest for RCC column , slab, lintel, bed lock T & L Beams, staircase waist slab, landing material at site and all labour charges and other incidental charges etc. complete for 3m height and removing the same after the specification period as directed by the departmental officer etc complete as per standard specification.					
5.	144 Cum	Plain Cement concrete 1:3:6 (One cement Three sand and six hard broken, granite) Using 20mm ISS gauge hard broken granite stone jelly for foundation including watering wherever necessary and in layers not more than 15 cm in thick etc., including compacting and fixing the expansion joint of bitumen pad and all materials to site and all labour charges and all other including charges etc., completed.					
6.	331 Cum	Plain Cement concrete 1:2:4 (One cement Two sand and four hard broken granite) Using 20mm ISS gauge hard broken granite stone jelly for foundation including watering wherever necessary and in layers not more than 15 cm in thick etc., including compacting and fixing the expansion joint of bitumen pad and all materials to site and all labour charges and all other including charges etc., completed.					
7.	32 Sqm	Providing and fixing Bitumen expansion pad including cost and convince of Bitumen Pad and fixing in proper position etc., completed as per standard specification as directed by Engineer. Incharge.					
8.	3.00 Cum	RCC 1:1 ½ : 3 (one cement one and half sand three aggregate mix using 20mm ISS HBG jelly including cost and conveyance of materials to site all other labour charges including curing etc complete with standard specification.					
9.	200.00 Kg	Supply and fabrication of steel for RCC item placing equal interval including cost and conveyance and all labours etc complete					
10.	22.00 Sqm	Plastering with cement 1:4- :12 mmm thick including cost and all materials to site and all other labours charges etc complete.					
11.	8.00 Cum	Plain Cement concrete 1:3:6 (One cement Three sand and six hard broken, granite) Using 40 mm ISS gauge hard broken granite stone jelly for foundation including watering wherever necessary and in layers not more than 15 cm in thick etc., including compacting and fixing the expansion joint of bitumen pad and all materials to site and all labour charges and all other including charges etc., completed.					

Signature of Contractor :

No. of Corrections :

No. of over writings :

LEAD STATEMENT

S.No	Details of Materials	Location of Quarry	Lead in Kilometer
1	Cement	Local	1
2	Steel rods	Local	1
3	Sand	Pulavanur	14
5	Quarry Rubbish	Kunnathur	43
6	Gravel	Azhakapasamudiram	22
7	Well Gravel	Azhakapasamudiram	22
8	Stone dust	Kunnathur	43
9	90 mm ISS HBG metal	Kunnathur	43
10	80 mm ISS HBG metal	Kunnathur	43
11	63 mm ISS HBG metal	Kunnathur	43
12	50 mm ISS HBG metal	Kunnathur	43
13	40mm ISS HBG Metal	Kunnathur	43
14	25 mm ISS HBG Metal	Kunnathur	43
15	20mm ISS HBG Metal	Kunnathur	43
16	12mm ISS HBG Metal	Kunnathur	43
17	10mm ISS HBG Metal	Kunnathur	43
18	6mm ISS HBG Metal	Kunnathur	43
19	3mm ISS HBG Metal	Kunnathur	43
20	Binding wire (Black 18G)	Local	1
21	Binding wire Galvanized 18G	Local	1

SCHEDULE 'B'

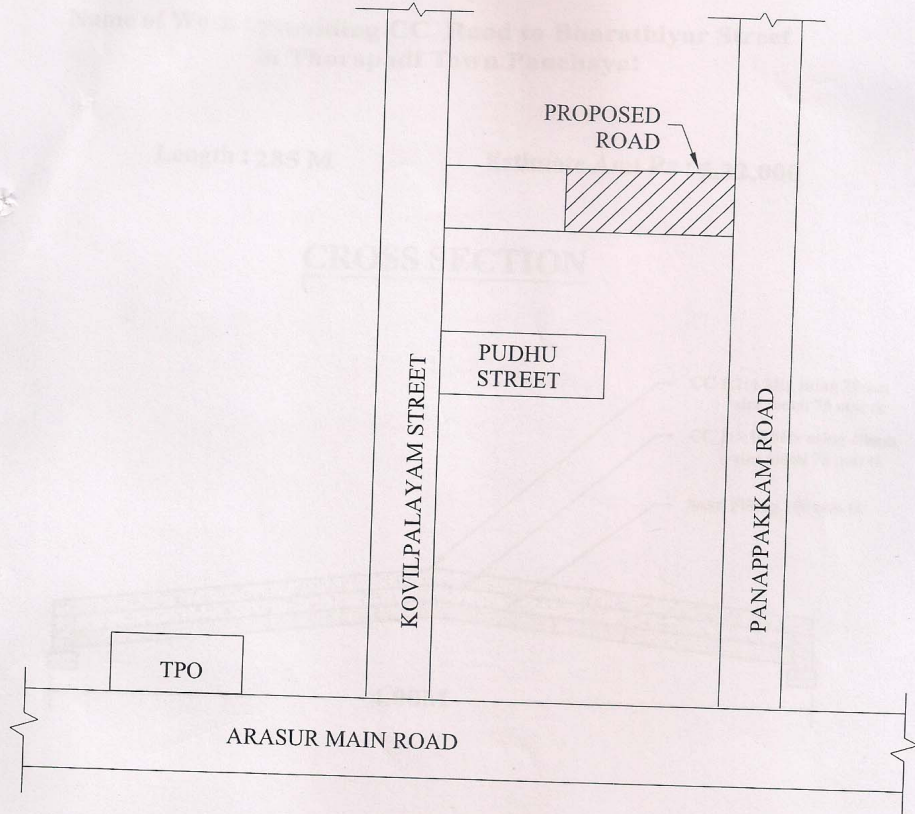
Sl. No.	Drawing No.	Description	Date on which drawing was approved
1	2	3	4

THORAPADI TOWN PANCHAYAT


SITE PLAN

NAME OF STREET : BHARADHIYAR STREET

LENGTH : 285 M



Assistant Executive Engineer
Town Panchayat Works
Cuddalore Zone.

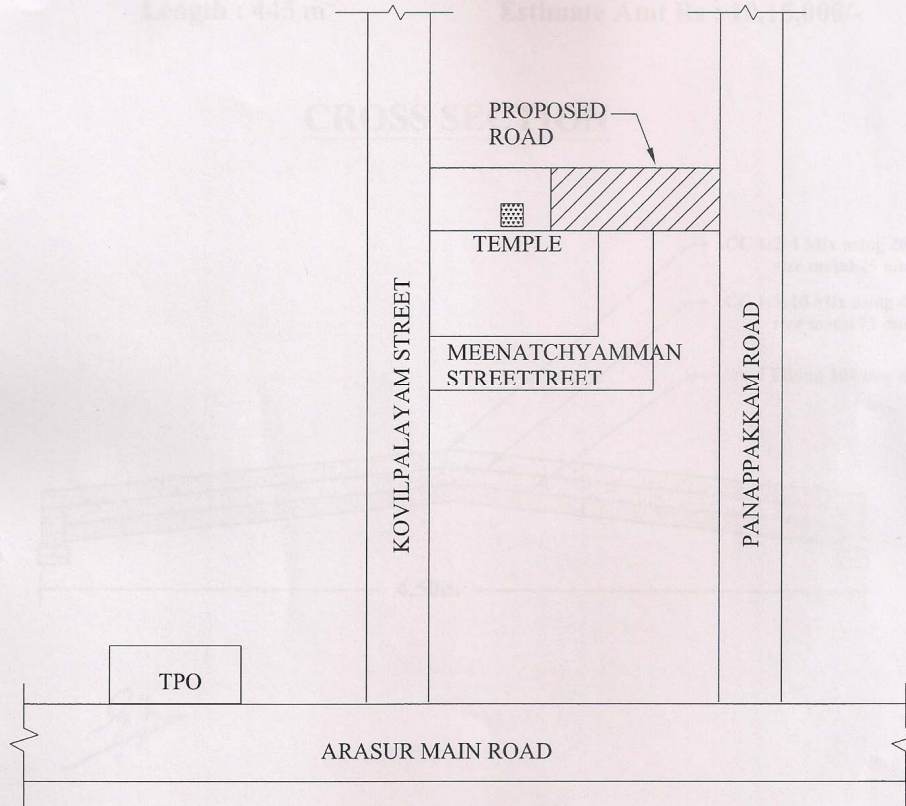

Assistant Engineer
Town Panchayat Works
Thittagudi.

THORAPADI TOWN PANCHAYAT


SITE PLAN

NAME OF STREET : VELLATHUMARIYAMMAN KOIL STREET

LENGTH : 445 M



Assistant Executive Engineer
Town Panchayat Works
Cuddalore Zone.

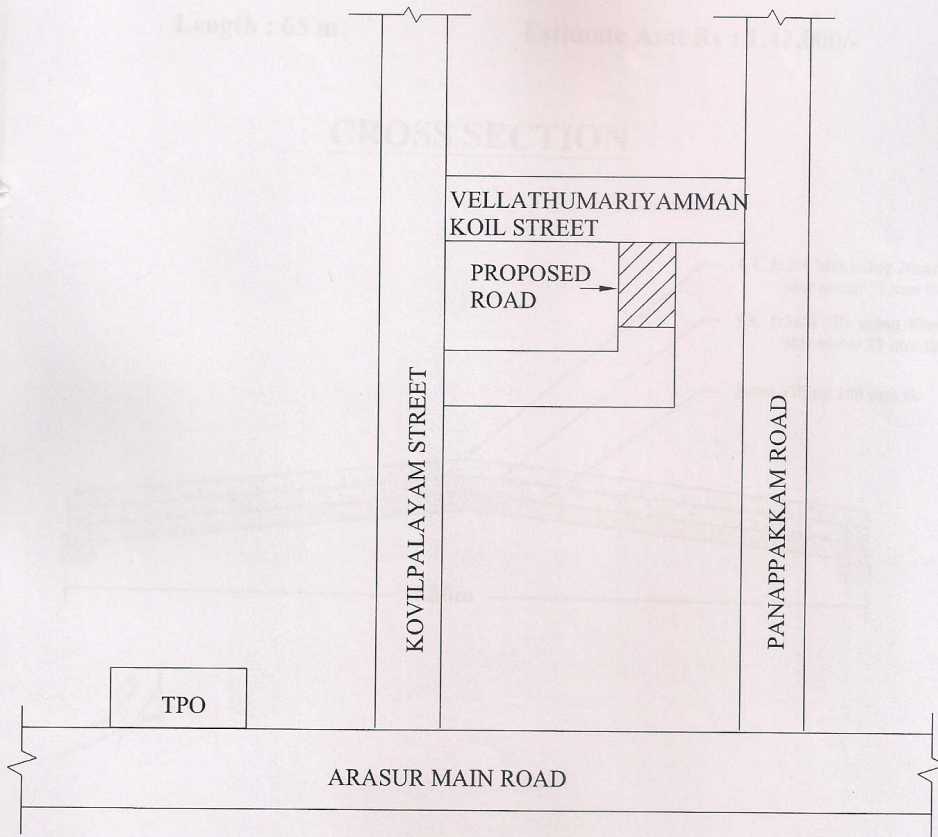

Assistant Engineer
Town Panchayat Works
Thittagudi.

THORAPADI TOWN PANCHAYAT


SITE PLAN

NAME OF STREET : MEENATCHYAMMAN KOIL STREET

LENGTH : 65 M



**Assistant Executive Engineer
Town Panchayat Works
Cuddalore Zone.**

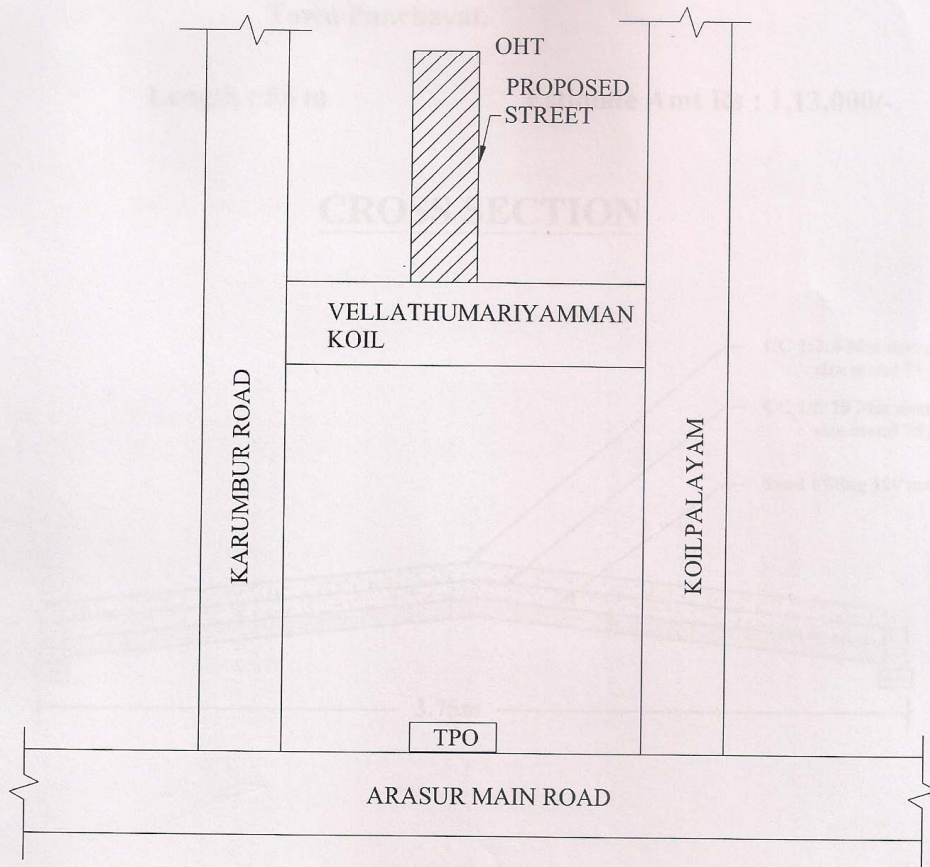

**Assistant Engineer
Town Panchayat Works
Thittagudi.**

THORAPADI TOWN PANCHAYAT


SITE PLAN

NAME OF STREET : VELLATHUMARIYAMMAN KOIL TO OHT

LENGTH : 58 M



**Assistant Executive Engineer
Town Panchayat Works
Cuddalore Zone.**

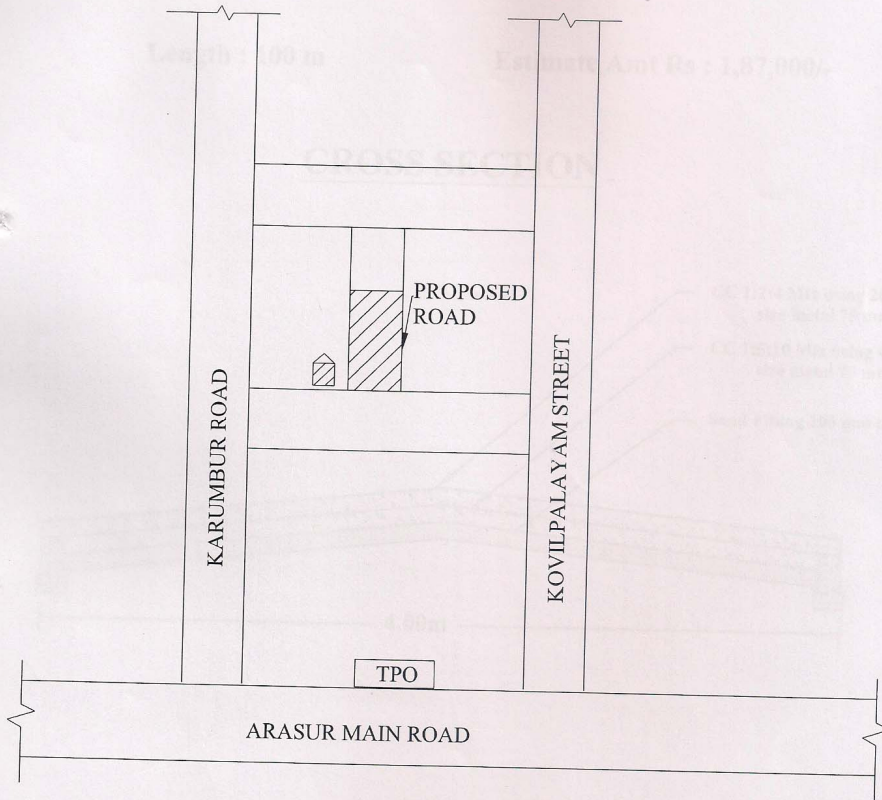

**Assistant Engineer
Town Panchayat Works
Thittagudi.**

THORAPADI TOWN PANCHAYAT


SITE PLAN

NAME OF STREET : NERINJIPETTAI STREET

LENGTH : 100 M



**Assistant Executive Engineer
Town Panchayat Works
Cuddalore Zone.**

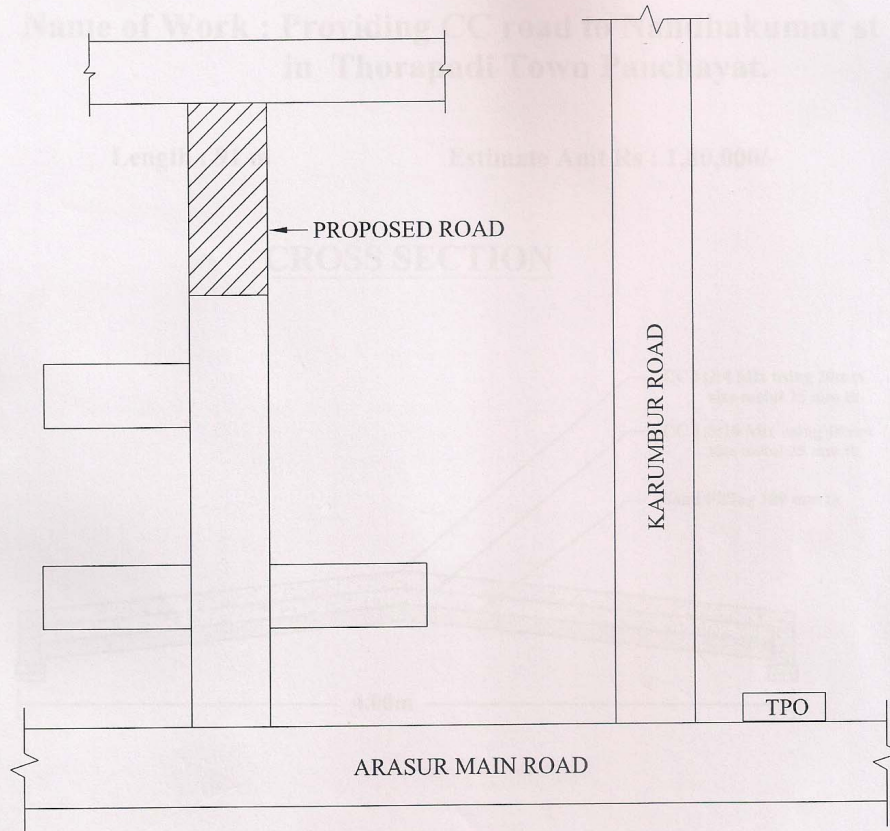

**Assistant Engineer
Town Panchayat Works
Thittagudi.**

THORAPADI TOWN PANCHAYAT


SITE PLAN

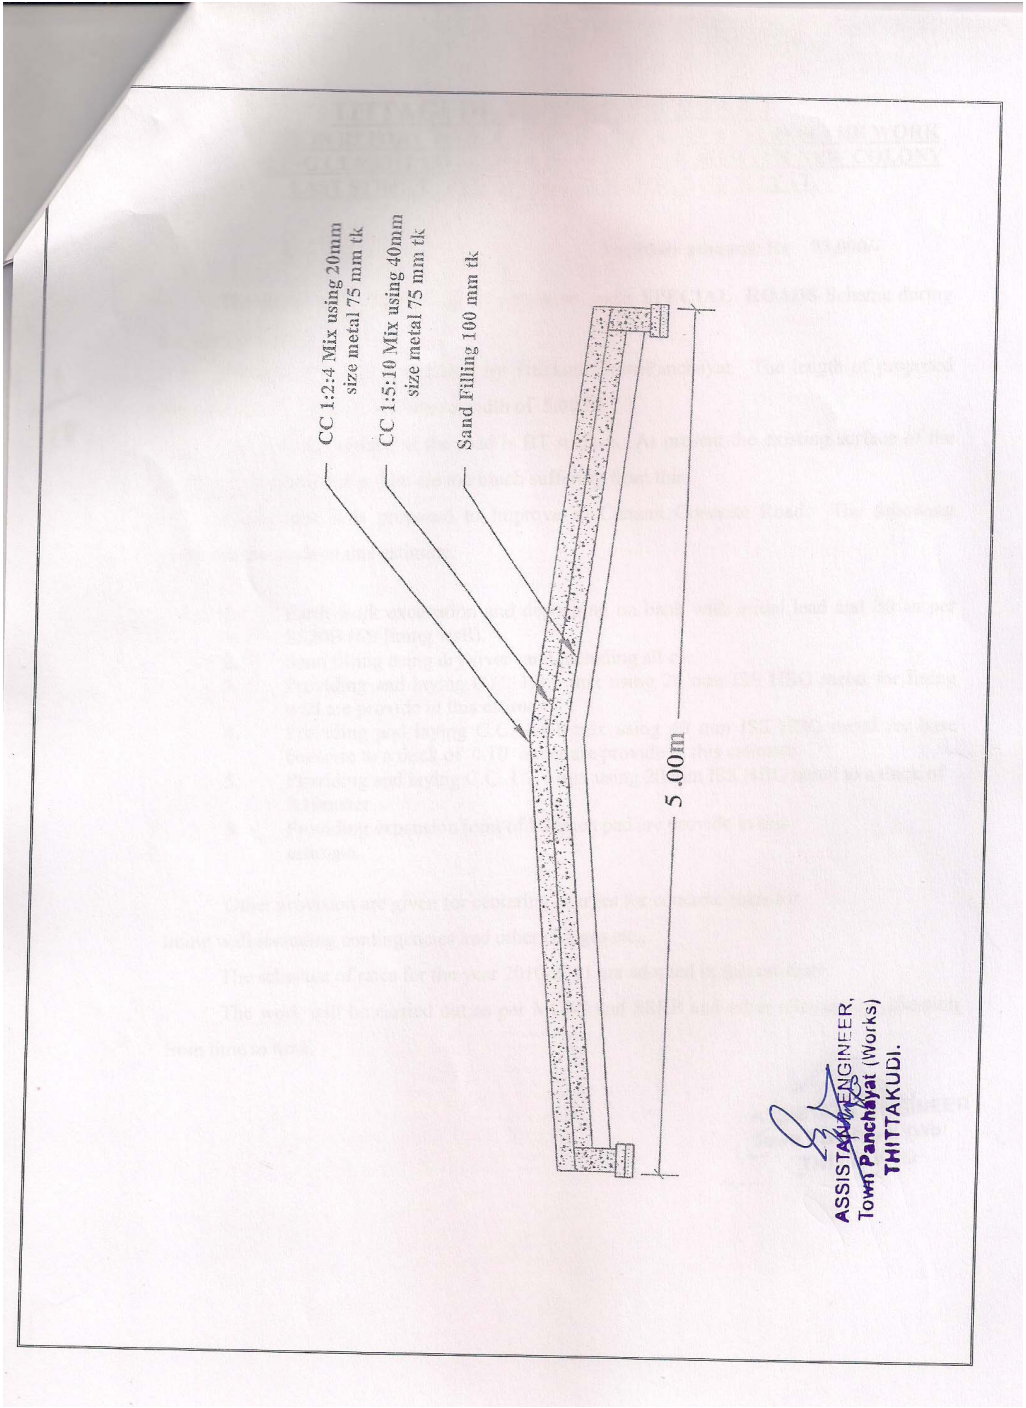
NAME OF STREET : NANDHAKUMAR STREET


LENGTH : 91 M



**Assistant Executive Engineer
Town Panchayat Works
Cuddalore Zone.**


**Assistant Engineer
Town Panchayat Works
Thittagudi.**




ASSISTANT ENGINEER,
Town Panchayat (Works)
THITTAKUDI.